

CHART A

NOTES:

1. CABLE SPECIFICATION: UL2464 16AWG*2C+24AWG*1C+P.
(19/0.30BC*2C+1/0.50BC*1C+PAPER)*1C.

OUTER JACKET PVC,BLACK IN COLOR,OD: 7.5±0.15.

PRINT WORD: " E198848-D (UL) CMX Outdoor - CMR 75 1Cx24AWG/2Cx16AWG
E124763-D AWM 2464 80 300V VW-1 CYBERPOWER".

2. ELECTRICAL TEST

<1>.100% OPEN SHORT & MISS WIRE TEST


<2>.INSULATION RESISTANCE: DC 400V 50M ohm MIN

<3>.CONDUCTOR RESISTANCE: 3 ohm MAX

3. INSERTION/PULL OUT TEST:

<1>.PLUG (INSERTION/PULLING FORCE)BY 7.2±0.8KG

4.PACKING: 1PC/PE BAG+WHITE CARTON.

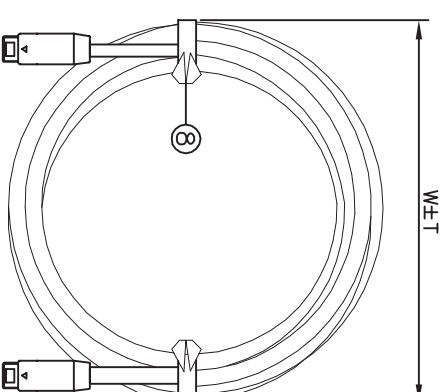

HANK CHART