

PIN OUT

MD 9P/M		7P/Housing
P1		P2
1+2	RED	1
8+9	BLACK	2
3	GREEN	3
4	GRAY	4
5	BROWN	5
6	BLUE	6
7	ORANGE	7

12	MINI TIE	PE/WHITE IN COLOR	2	
11	CABLE SPEC	CABLE SPEC DETAIL SEE CHART A	1	
10	7P HOUSING/M-OUTER MOLD	MOLDING PVC/GRAY IN COLOR	1	
9	7P HOUSING/M-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1	
8	7P HOUSING/M-INSULATOR	PBT/GRAY UL94V-0	1	
7	7P HOUSING/M-CONTACT	PHOSPHOR BRONZE/TIN PLATED;SOLDER TYPE	7	
6	MD 9PIN/M-DUST COVER	PET/TRANSPARENT IN COLOR	1	
5	MD 9PIN/M-OUTER MOLD	OUTER MOLDING,45P PVC,GRAY IN COLOR	1	
4	MD 9PIN/M-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1	
3	MD 9PIN/M-SHELL	BRASS/NICKEL PLATED	1	
2	MD 9PIN/M-INSULATOR	P.B.T/BLACK IN COLOR	1	
1	MD 9PIN/M-CONTACT	BRASS/PIN NICKEL PLATED, SOLDER TYPE	9	
NO.	PARTS NAME	STANDARD SPECIFICATION	Q'TY	SUPPLIER
MATERIAL LIST				


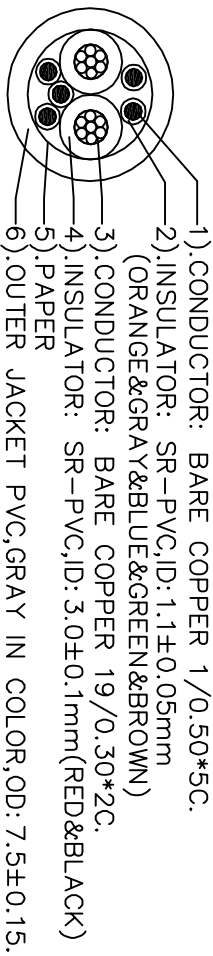


CHART A

Model	CyberPower PN	LE T	WE T
CBL7PINBUL-004-CM	1MB-0000032-01G	1220±25	120~130
CBL7PINBUL-006-CM	1MB-0000033-01G	1830±30	140~150
CBL7PINBUL-010-CM	1MB-0000034-01G	3050±50	
CBL7PINBUL-020-CM	1MB-0000035-01G	6100±75	
CBL7PINBUL-030-CM	1MB-0000041-01G	9150±100	160~170
CBL7PINBUL-050-CM	1MB-0000042-01G	15250±150	

TAPE SEALED

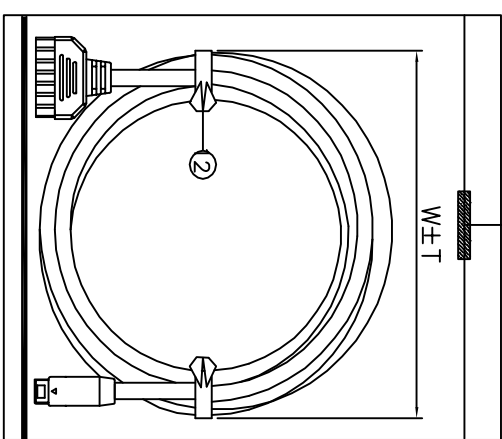

- 2.ELECTRICAL TEST
 <1>.100% OPEN SHORT & MISS WIRE TEST
 <2>.INSULATION RESISTANCE: DC 400V 50M ohm MIN
 <3>.CONDUCTOR RESISTANCE: 3 ohm MAX
 3.INSERTION/PULL OUT TEST:
 <1>.PLUG (INSERTION/PULLING FORCE)BY 7.2±0.8KG
 4.PACKING:1PC/PE BAG+WHITE CARTON.

- NOTES:
 1.CABLE SPECIFICATION: UL2464 16AWG*2C+24AWG*5C.
 (19/0.30BC*2C+1/0.50BC*5C+PAPER)*1C.
 OUTER JACKET PVC,GRAY IN COLOR,OD:7.5±0.15.
 PRINT WORD: " E198848-D (UL) CMR - CMX 75 5C*24AWG/2CX16AWG E124763-D AWM
 2464 80 300V VW-1 CYBERPOWER".

CyberPower®

1PC EACH BAG
 HANK CHART